


B.1 What this chapter contains

Dimension drawings of the TETA MA610 are shown below. The dimensions are reference in millimeters and inches.

B.2 Keypad structure


B.2.1 Structure chart

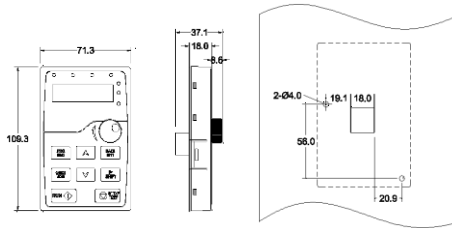


keyboard without bracket mounting hole size

B.2.2 Installation chart

Note: The external keypad can be fix by M3 screws directly or the installation bracket. The installation bracket for inverters of 0.75~30kW is optional and the installaion bracket for inverters of 37~500kW is optional or substitutive by the external standard one.

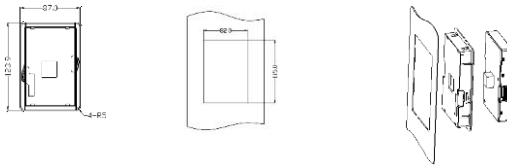


Installation bracket of the key (0.75~500kW)(optional)

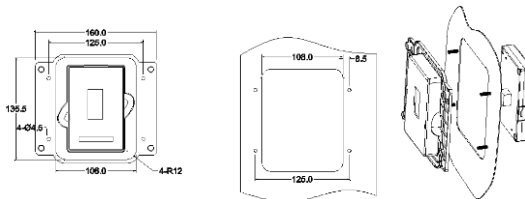


Installation bracket of the key (37~500kW)(standard)

B.3 Inverter chart


B.3.1 Wall mounting

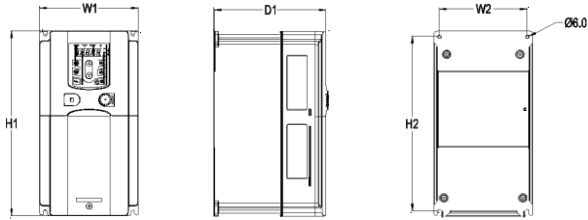


0.75-15kW wall mounting

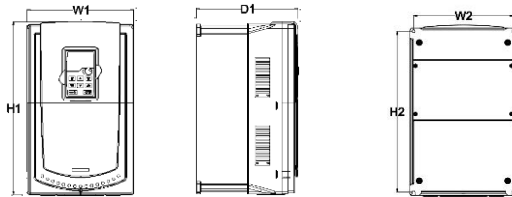


18.5-30kW wall mounting

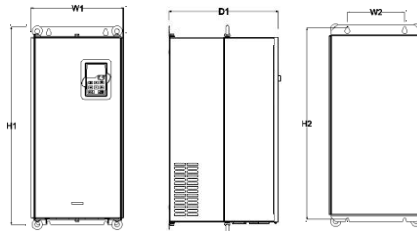

37-110kW wall mounting

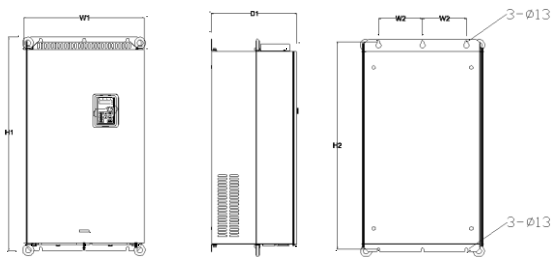


132-20kW wall mounting

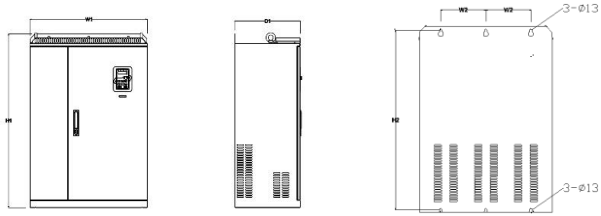


220-315kW wall mounting
Installation dimension (unit: mm)

Model	W1	W2	H1	H2	D1	Installation hole
0.75kW ~2.2kW	126	115	186	175	174.5	5
4kW ~5.5kW	146	131	256	243.5	181	6
7.5kW ~15kW	170	151	320	303.5	216	6
18.5kW	230	210	342	311	216	6
22kW ~30kW	255	237	407	384	245	7
37kW ~55kW	270	130	555	540	325	7
75kW ~110kW	325	200	680	661	365	9.5
132kW ~200kW	500	180	870	850	360	11
220kW ~315kW	680	230	960	926	379.5	13


B.3.2 Flange mounting

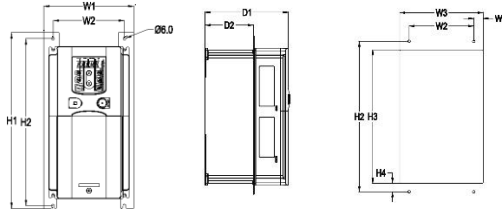


0.75-15kW flange mounting

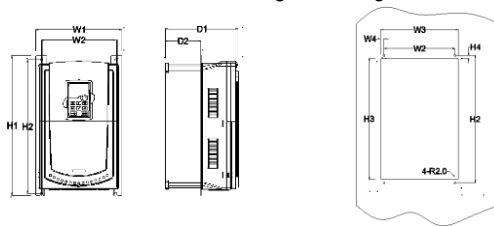

18.5-30kW flange mounting

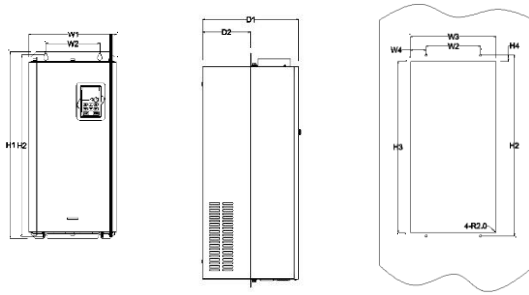

37-110kW flange mounting

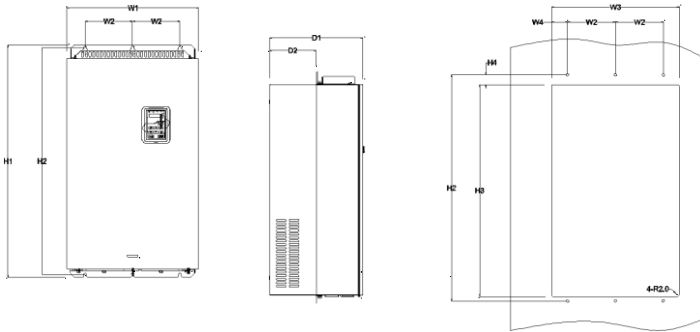


132-200kW flange mounting


Installation dimension (unit: mm)

Model	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	Installation hole
0.75kW~2.2kW	150.2	115	130	7.5	234	220	190	13.5	155	65.5	5
4kW~5.5kW	170.2	131	150	9.5	292	276	260	6	167	84.5	6
7.5kW~15kW	191.2	151	174	11.5	370	351	324	12	196.3	113	6
18.5kW	250	210	234	12	375	356	334	10	216	108	6
22kW~30kW	275	237	259	11	445	426	404	10	245	119	7
37kW~55kW	270	130	261	65.5	555	540	516	17	325	167	7
75kW~110kW	325	200	317	58.5	680	661	626	23	363	182	9.5
132kW~200kW	500	180	480	60	870	850	796	37	358	178.5	11

B.3.3 Floor mounting

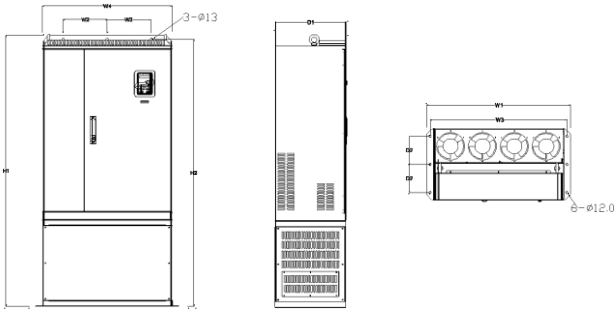

220-315kW floor mounting

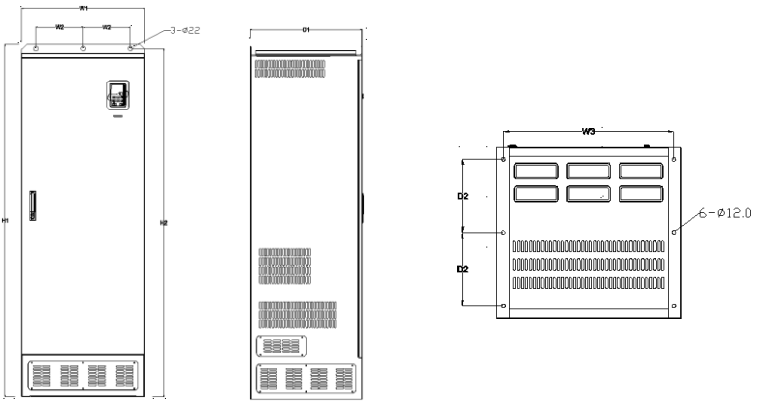

50-500kW floor mounting

Model	W1	W2	W3	W4	H1	H2	D1	D2	Installation hole
220kW ~315kW	750	230	714	680	1410	1390	380	150	13\12
350kW ~500kW	620	230	573	\	1700	1678	560	240	22\12